




Rack-Mammut® Floor Rail Barrier Flex

Technical data sheet

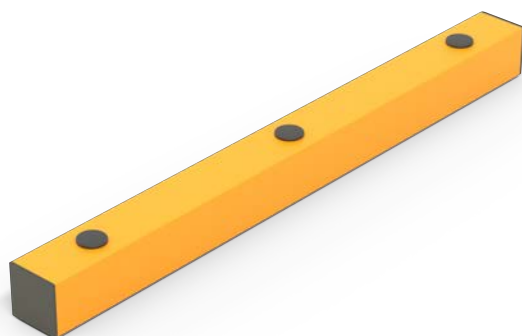

Parts list

1. 1 x floor rail barrier **(A)**
2. 3 x black cover caps **(B)**
3. 3 x ground anchors (length 100 mm, Ø 12 mm)



For particularly high traffic volumes

ASSEMBLY INSTRUCTIONS

3 holes are required to install the Floor Rail Barrier Flex.

3 holes: 100 mm deep, Ø 12 mm (floor anchor)

Take the individual parts out of the packaging (see parts list)

2. Position the floor barrier at the desired point of application (we recommend a minimum distance of 100 mm from the area to be protected, e.g. hall wall or machine)

Remove the cover caps (B) and mark the drill holes through the openings in the floor barrier. Remove the floor barrier again and drill holes in the pre-marked holes using an appropriate drill holes in the pre-marked locations.

Thoroughly clean the work area and the drill holes

Separate the nuts and washers from the ground anchors and fasten them in the pre-drilled holes.

Position the ground barrier over the already attached ground anchors

Place the washers on the ground anchors and tighten the nuts with a torque wrench with extension

a torque wrench with extension

Finally, place the black cover caps (B) on the fixing holes

