

TABLE

FACT SHEET



TABLE



UX DESIGN AWARDS | Nominated 2015



reddot award 2015
winner

Interior
innovation
award
2015
Winner

GERMAN
DESIGN
AWARD
WINNER
2016

GERMAN
DESIGN
AWARD
GOLD
2017



TECHNICAL DATA

	TABLE LINEAR	TABLE RADIAL
Product	9201	9202
Colours	01 black 02 white 23 aluminium	
Dimensions	Height: 300 mm – 750 mm	
	Radius: 100 mm – 550 mm	
	Lamp base: (W x D x H): 250 mm x 250 mm x 8 mm	Lamp base: (Ø): 250 mm x 8 mm
Material	Aluminium, zinc, steel (lamp base), plastic	
Weight	6 kg	4,5 kg
Energy efficiency	A++*	
Protection type	IP 20	
Protection class	III ⚡	
Illuminants		
LEDs	2 cold white & 2 warm white LEDs (CREE)	
Power consumption	9,5 W**	
Luminous flux of luminaire:	neutral white 680 lm*	
Light intensity	neutral white 566 cd*	
Illuminance	1,000 lux at a height of 60 cm	
Luminous efficiency	neutral white 73 lm/W*	
Colour temperature (CCT)	2.700 K / 3.600 / 6.500 K	
Colour reproduction index	≥ 80	
Operating temperature on lamp head	≤ 40°C at 25°C ambient temperature	
Burning life	over 50,000 hours	
Standby consumption	≤ 0,5 W	
Nominal voltage	12–14 V DC	
Protection class	II ☑	
VITACORE®		
Operation	via VITACORE® electronics	
Light strength setting	in 5 steps up to 1,000 lux	
Setting of light colour	in 3 steps 2,700 / 3,600 / 6,500 K	
Touch panel	made of acrylic glass	
Power supply unit		
Desktop power supply	Europlug & BS 1363 (British 3-pin) plug	
DC cable length	1,5 m	
Nominal voltage	100–240 V, 50–60 Hz	
Power consumption	1,5 A	
Output	max. 12 V, 48 W, 4 A DC	

*with warm white and cold white LEDs switched on

**with cold white LEDs switched on to 100%

TECHNICAL VIEW

TABLE LINEAR
9201



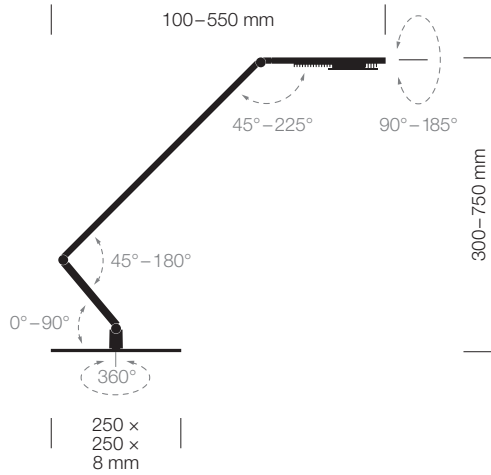


TABLE RADIAL
9202

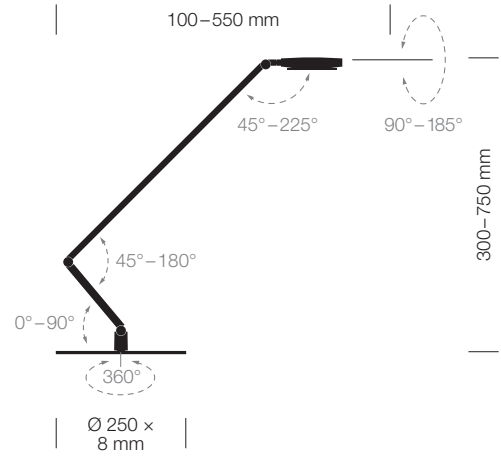

LIGHT INTENSITY DISTRIBUTION

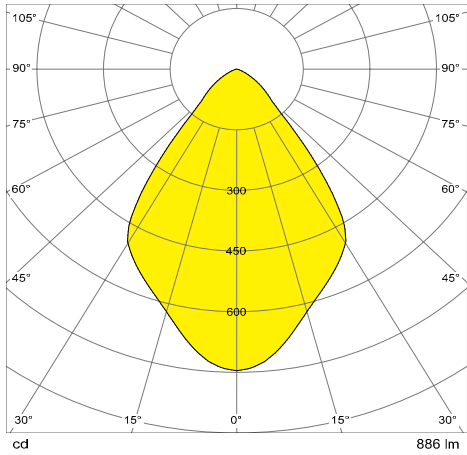

Free download on
www.luctra.eu

LUCTRA

LUCTRA® is a brand of
DURABLE · Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77-79 · 58636 Iserlohn
P.O. Box 1753 · 58634 Iserlohn · Germany
Phone +49 2371 662445
info@luctra.eu · www.luctra.eu